


**HYDROSTOP 2 PY-P**

**HYDROSTOP 2 PY-P** is APP Polymer Modified Bituminous Waterproofing Membrane Sheet of 2mm Thickness.

Composed of Non-Woven Composite Matrix of Polyester Mat as Core Reinforcing Media suitably finished with Thermo Fusible Polyethylene Film on top and bottom side of sheet.

Application: Hot / Cold Bitumen Mopping  
 Membrane Size: 1m x 10 m Rolls  
 Top Finish : Plain – Thermo Fusible Polyethylene Film  
 Bottom Finish: Plain – Thermo Fusible Polyethylene Film

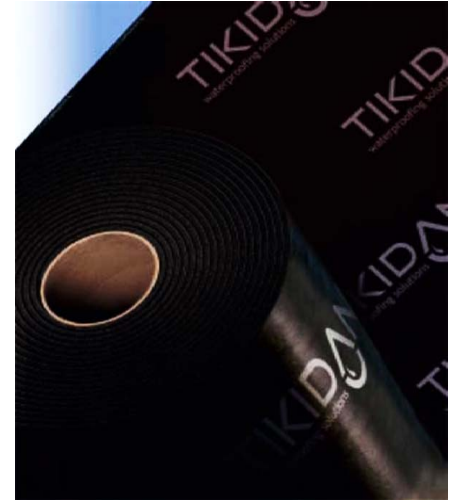

**TECHNICAL DATA**

Properties	Typical Values	Unit	Test Standard
Longitudinal Tensile Strength	600	N/5cm	ASTM D 5147
Transversal Tensile Strength	400	N/5cm	ASTM D 5147
Elongation at Break (Longitudinal)	30	%	ASTM D 5147
Elongation at Break (Transverse)	30	%	ASTM D 5147
Water Absorption	< 0.20	%	ASTM D 5147
Flexibility at Low Temperature (No Cracks)	Up to 0	° C	ASTM D 5147
Dimensional Stability (L/T)	≤ 0.5	%	ASTM D 5147
High Temperature Flow Resistance(No Flow)	>120	°C	ASTM D 5147


**ADDITIONAL TECHNICAL DATA**

Properties	Typical Values	Unit	Test Standard
Nominal Thickness*	2.0	mm	ASTM D 5147
Penetration @ 25° C^	<20	dmm	ASTM D 5
Softening Point^	>150	°C	ASTM D 36

\*Tolerance:- Thickness: - ±10%, Longitudinal Tensile Strength: ± 200 N/5cm, Transversal Tensile Strength: ± 150 N/5cm, Elongation at Break: ± 15%,  
 ^ Compound Properties Tested During Manufacturing Process  
 Note: The results given are laboratory test results of manufactured samples. Results derived from field applied samples may vary.

PRESENTATION

TECHNICAL DATA	VALUE	UNIT
Length	10	m
Width	1	m
Roll Surface Area	10	m <sup>2</sup>
Product code	110024	-

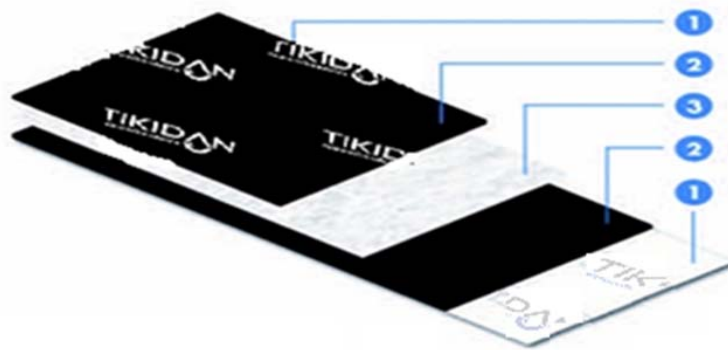

1. Polyethylene Film
2. App Polymer Modified Bitumen
3. Polyester Mat

**WARNING**

The information that appears in the following document makes reference to the uses and utilities of **TIKIDAN** products and systems, and it is based on the knowledge that have been learnt until Present by **TIKIDAN**. This is on ly possible if pr oducts have been stor ed and used in an appropriate way. Nevertheless, **TIKIDAN** is not responsible for unsuitable uses of the products neither any other fact. So **TIKIDAN** is just r esponsible for the quality r elated to the provided products.

**TIKIDAN** reserves the right to carry out product modifications without previous notice.

The values that appear i n the te chnical data sheet are the results of the tests that have been performed in our laboratory.