

## HYDROSTOP PLUS 2PY-P

**HYDROSTOP PLUS 2PY-P** is APP Polymer Modified Bituminous Waterproofing Membrane Sheet of 2mm Thickness.

Composed of Non-Woven Composite Matrix of Polyester Mat as Core Reinforcing Media suitably finished with Thermo Fusible Polyethylene Film on top and bottom side of sheet.

Application: Hot / Cold Bitumen Mopping

Membrane Size: 1m x 10 m Rolls

Top Finish : Plain – Thermo Fusible Polyethylene Film

Bottom Finish: Plain – Thermo Fusible Polyethylene Film



## TECHNICAL DATA

Properties	Typical Values	Unit	Test Standard
Longitudinal Tensile Strength	650	N/5cm	ASTM D 5147
Transversal Tensile Strength	400	N/5cm	ASTM D 5147
Elongation at Break (Longitudinal)	40	%	ASTM D 5147
Elongation at Break (Transverse)	50	%	ASTM D 5147
Water Absorption	< 0.20	%	ASTM D 5147
Flexibility at Low Temperature (No Cracks)	Up to 0	° C	ASTM D 5147
Dimensional Stability (L/T)	≤ 0.5	%	ASTM D 5147
High Temperature Flow Resistance(No Flow)	>120	°C	ASTM D 5147

## ADDITIONAL TECHNICAL DATA

Properties	Typical Values	Unit	Test Standard
Nominal Thickness*	2.0	mm	ASTM D 5147
Penetration @ 25° C^	<20	dmm	ASTM D 5
Softening Point^	>150	°C	ASTM D 36

\*Tolerance:- Thickness: - ±10%, Longitudinal Tensile Strength: ± 200 N/5cm, Transversal Tensile Strength: ± 150 N/5cm, Elongation at Break: ± 15%,

^ Compound Properties Tested During Manufacturing Process

Note: The results given are laboratory test results of manufactured samples. Results derived from field applied samples may vary.


TIKI TAR DANOSA (INDIA) PRIVATE LIMITED

Tiki Tar Estate, Village Road, Bhandup (West), Mumbai – 400 078. India

Tel: +91 22 4126 6699, Fax: +91 22 2566 7830, E-Mail: [info@tikidan.in](mailto:info@tikidan.in), Web: [www.tikidan.in](http://www.tikidan.in)

PRESENTATION

TECHNICAL DATA	VALUE	UNIT
Length	10	m
Width	1	m
Roll Surface Area	10	m <sup>2</sup>
Product code	210024	-

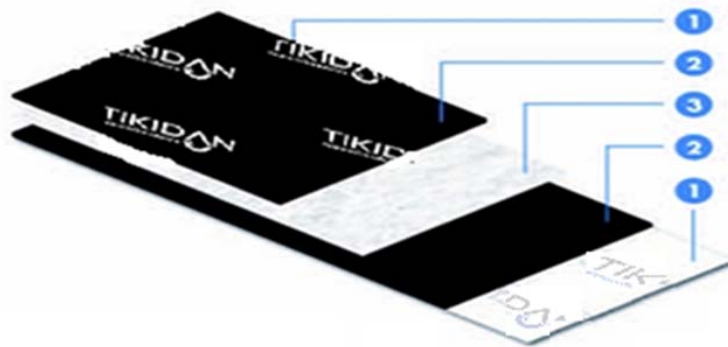

1. Polyethylene Film
2. App Polymer Modified Bitumen
3. Polyester Mat

**WARNING**

The information that appears in the following document makes reference to the uses and utilities of **TIKIDAN** products and systems, and it is based on the knowledge that have been learnt until Present by **TIKIDAN**. This is on ly possible if pr oducts have been stor ed and used in an appropriate way. Nevertheless, **TIKIDAN** is not responsible for unsuitable uses of the products neither any other fact. So **TIKIDAN** is just r esponsible for the quality r elated to the provided products.

**TIKIDAN** reserves the right to carry out product modifications without previous notice.

The values that appear i n the te chnical data sheet are the res ults of the tests that have been performed in our laboratory.